


# SH SERIE 101

Small seed drill



**The SH is a small seed drill which can be used on KUHN OPTIMER, DISCOVER, MIXTER and CULTIMER stubble cultivators. It is used to seed cover crops such as mustard, phacelia, rye grass... while stubble ploughing.**


WITH THE SH, SEED COVER CROPS WHILE STUBBLE PLOUGHING!

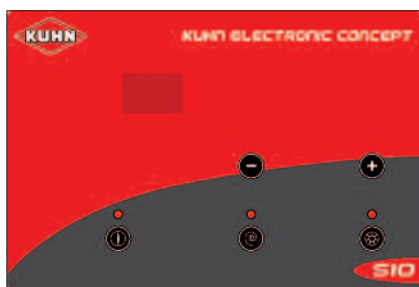

### Easy, accurate adjustment of seed density


A variator in the cab is used to adjust the speed of the metering roller to adapt to:

- Seed density;
- Tool width;
- Work speed.

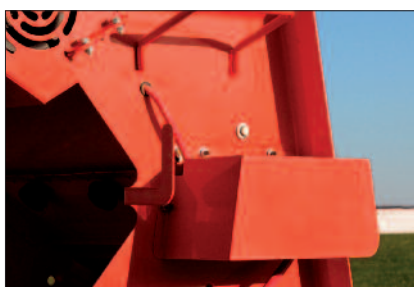

### Electric drive for the metering roller

The metering roller is driven by an electric motor. This requires constant working speed.

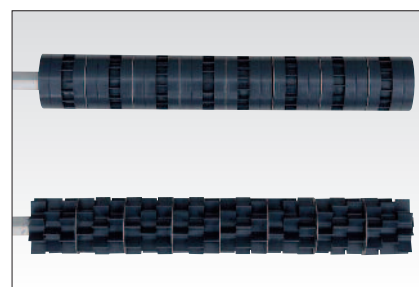

### Metering rollers

Depending on the type of seed, two metering rollers can be exchanged without tools for small or large seeds).




### Electric blower

The seeds are routed through the pipes by a double blower with electric drive (control box in the cab).



### Even seeding

Bursters at the pipe outlets (8) ensure even distribution of seeds across the entire working width.

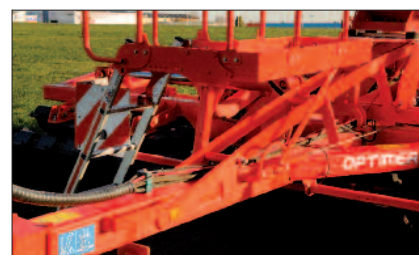

### Safe access

Access to the hopper for filling is safe, with an ex-works mounted ladder and walkway.

SPECIFICATIONS		SH 151	SH 401
Hopper	Hopper capacity (l)	150	400
	Hopper material	Polyethylene	Steel
Distribution	Metering units	1 small seed/1 large seed	
	Unit drive	Electric	
	Disengageable agitator	Standard	
	Method of distribution	Constant flow	
	Minimum seed application rate (rape)	2 kg/ha (over 3 m width at 7 km/h)	
Blower	Blower drive	Electric (tractor battery)	
	Blower mode	By bursters	
Seeding	Number of seed chutes	8	
	Per s box S 10 in cab	Standard	
Seed management	Adjustment of seed application rate	Standard	
	Blower on-off switch	Standard	
	Metering unit roller on and off switch	Standard	

Small seed drill	OPTIMER 101 and 1002	DISCOVER XS, XM and XL 52	MIXTER 100	CULTIMER 100
SH 151	X	X	X	X
SH 401	X	X	MIXTER 107 only	X

Our material is produced in accordance with the European Machinery Directive in the member states of the European Union. In countries outside the E.U., our machinery complies with the safety regulations set by the country concerned. Some safety devices may have been removed from our leaflets in order to clarify the illustration. Under no circumstances should the machine be operated without the necessary safety devices in place (as specified by the assembly instructions and operators manual). We reserve the right to change any designs, specifications or materials listed without further notice. Our models and trademarks are patented in more than one country. Machines and equipment in this leaflet can be covered by at least one patent and/or registered design. Registered trademark(s).

YOUR KUHN DEALER :

KUHN NORTH AMERICA - Corporate Headquarters  
 1501 West Seventh Avenue - P.O. Box 167  
 Brodhead, WI 53520-0167 USA  
 Tel: (608) 897-2131 - Fax: (608) 897-2561  
 www.kuhnnorthamerica.com

KUHN FARM MACHINERY PTY. LTD  
 7 Manorwood Pl. - MITCHAM, 3132 VIC,  
 Fax: 03 9874 3462  
 www.kuhn.com

United Kingdom :  
 KUHN FARM MACHINERY (U.K.) LTD  
 Stafford Park 7,  
 TELFORD - SHROPSHIRE TF 3 3 BQ  
 Phone: TELFORD (01952) 239300/1/2  
 Fax: (01952) 290091  
 www.kuhn.co.uk

